

RoHS compliant

Product lineup





Product image

TD88(G-L)

Product name	Torque [mN·m] (lbf·in)	Damping direction	Cap color
TD88R1-100	10.0 ± 5 (0.09 ± 0.04)		
TD88R1-200	20.0 ± 8 (0.18 ± 0.07)	CW	Dark gray
TD88R1-300	30.0 ± 9 (0.27 ± 0.08)	Ovv	Dain gray
TD88R1-400	40.0 ± 10 (0.35 ± 0.09)		

Features

- Outer mounting diameter of Ø 15 mm
- One direction rotary damper
- Facilitates easy centering during mounting
- High durability


Product name	Torque [mN·m] (lbf·in)	Damping direction	Cap color
TD88L1-100	10.0 ± 5 (0.09 ± 0.04)		
TD88L1-200	20.0 ± 8 (0.18 ± 0.07)	CCW	Grav
TD88L1-300	30.0 ± 9 (0.27 ± 0.08)	0000	Ciray
TD88L1-400	40.0 ± 10 (0.35 ± 0.09)		

The torque of all rotary dampers is measured at a rotational speed of 30 min⁻¹. The products without gear have "(G-L)" at the end of the product name.


Bidirectional TD88 rotary dampers are not available.

Product specifications

Durability

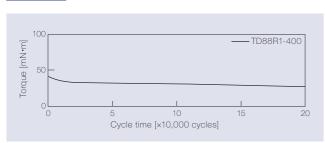


Measurement of torque at a rotation speed of 30 min⁻¹

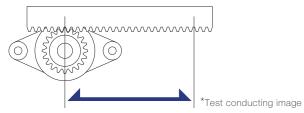


Test method	Rack-and-pinion
Travel speed	14 mm / sec
Pinion rotation speed	30 min⁻¹
Damper rotation frequency	One rotation in the CW and CCW directions, respectively
Durability	200,000 cycles

Temperature characteristics

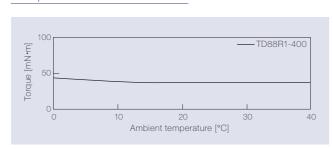


The torque achieved during rotation at 30 min⁻¹ in the designated ambient temperature is shown.


Speed characteristics

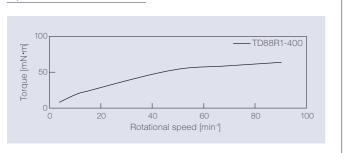

Product information

TD88 [mm] TD88 (G-L) [mm]

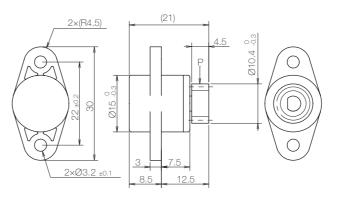

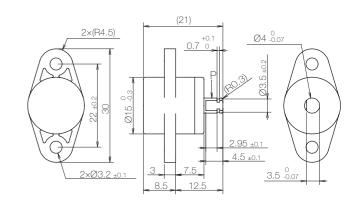

* General tolerance: ±0.3

Cap color

Dark gray

Gray

Gear specifications

Type	Standard spur gear
Tooth profile	Involute and full depth tooth
Module	0.8
Pressure angle	20°
Number of teeth	11
P.C.D[mm]	Ø 8.8
Addendum modification	_
Base tangent length / Number	3.67 / 2


- Product weight: Approx. 7 g (With gear)
- Allowable radial load (P): 5.0 N

Main materials

ion i i i occi i occi		
Housing	Plastic (PC)	
Cap	Plastic (PC)	
Gear	Plastic (POM)	
Shaft	Stainless steel (SUS)	

Dimensions related to mounting

[mm]



Damping directions

Damping direction of the shaft

